

# Datasheet

## Spray Stop Tape

# T-ISS

Revision 28-5-2019

### Product description

T-ISS SprayStop anti-splash tape is used for applications in the marine & offshore industry. The high-tech laminated multi-layer aluminium tape designed by safety specialists completely prevent spray out of hot & hazardous liquids, which would be one of main reasons on fire, explosions or other catastrophes.

According to the SOLAS amendment chapter 2-2 regulation, ships are to apply appropriate protection system to prevent leakage and splashing of flammable oil from FO, LO & other pipings.

Complies with the IMO A653 (6) regulation.

### Pictures



### Dimensions

Our SprayStop Tape, is available in rolls in the following sizes:

Width	Length	Thickness	Weight
35 mm	10 mtr	0,1 mm	0,1 kg
50 mm	10 mtr	0,1 mm	0,2 kg
100 mm	10 mtr	0,1 mm	0,3 kg
140 mm	10 mtr	0,1 mm	0,4 kg
250 mm	10 mtr	0,1 mm	0,7 kg
500 mm	10 mtr	0,1 mm	1,8 kg
1000mm	10 mtr	0,1 mm	4,0 kg

Other possible sizes on request


HS Code: 3919.1080

### Certificates & Standards

• DNV	No. P-14508
• GL	No. 45037-07 HH
• CCS	No. FS14T00041
• BV	No. 23131/B0 BV
• LR	No. 15/30014
• ABS	No. 15-LD1327835-PDA
• Rina	No. MAC441510CS
• KR	No. RTD25219-FP001
• Class NK	No. TA12425M
• Lloyds	No. RTS/ TA/ 1590308
• NIPPON KAIJI KYOKAI	No. 08FV901B
• FITI	No. M270-14-00441

### Applications & Use

Installation:

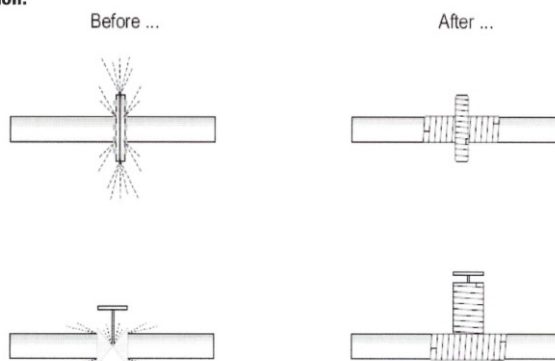

### Specifications

This high-tack protection tape was designed in order to prevent spray from hot liquids, which can come in contact with materials inside process-plants causing damages to equipment and operators.

- Max pressure : 15 bar
- Max temperature: +160 °C continuously, +200 °C shortly.
- Adhesive material tolerance: -70 °C up to +200 °C.
- Adhension : 1000 g above ; 25mm g/f.
- Shelflife : Minimum 3 years properly stored.