

## 2217 LED ATEX Specifications

### Unit Information

Model #: 2217LED ATEX / Item #16460  
UPC-IC (12 Digit): 016731164607

**Unit Dimensions** Length: 8.1 in. (20.6 cm) Width: 2.3 in. (5.8 cm) at head

### Master Pack Dimensions

Weight: 9.9 lbs. (4.5 kg)  
Cube: 1.43 ft<sup>3</sup> (0.04 m<sup>3</sup>)  
Quantity: 24

### Safety Approvals

IECEX Protection Methods:

**Ex ia IIB T3 Ga**  
**Ex ia IIIB T145°C Da**  
**-5°C ≤ +40°C**

ATEX Protection Methods:

**Ex II 1GD Ex ia IIB T3 Ga Ex ia IIIB T145°C Da -5°C ≤ Ta ≤ +40°C**

ZONE 0 BASEEFA


### Specifications

Power Source: 2x 'D' Cell Alkaline  
Light Source: LED  
Life: 30,000 hrs  
Runtime: 200 hrs  
Light Output: 80 Lumens/ 2,450 Candelas  
Beam Distance: 100 Meters  
Weight (Without batteries): 5.0 oz (.13 kg)

Approved For use with Duracell MN1300 or Energizer E95 cells only

### Product Features

- For use in hazardous atmospheres
- 'S' Biner included for quick attachment
- Waterproof, IP67 rating
- 'Switch Guard' Prevents accidental lighting
- Three-way switch : On-Momentary-Off
- Anti-roll tube

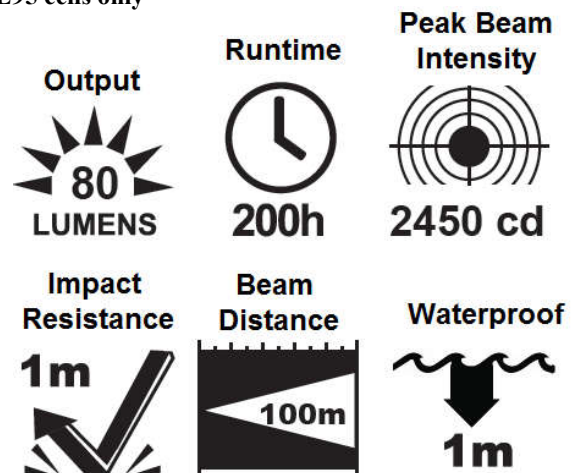

### Accessories

23853  
23860

### Description

6 ½" Red Snap In Wand  
6 ½" Yellow Snap In Wand



**WorkSafe™ Model # 2217LED ATEX**

