



DNH

HEAD OFFICE, NORWAY
DNH AS

Phone..... + 47 35 98 56 00
Fax..... + 47 35 98 56 10
E-mail..... dnh@dnh.no
Web-Site..... www.dnh.no


ENGLAND
DNH WW Ltd
Phone..... + 44 1908 275 000
Fax..... + 44 1908 275 100
E-mail..... dnh@dnh.co.uk

GERMANY
DNH GmbH
Phone... + 49 040 6569 30-0
Fax..... + 49 040 6569 30-30
E-mail..... dnh@dnh.de

USA
DNH Speakers Inc
Phone..... + 1 484 494 5790
Fax..... + 1 484 494 5793
E-mail..... dnh@dnhspeakers.com

HS-15EExIIN(T)


ISO 9001 CERTIFIED

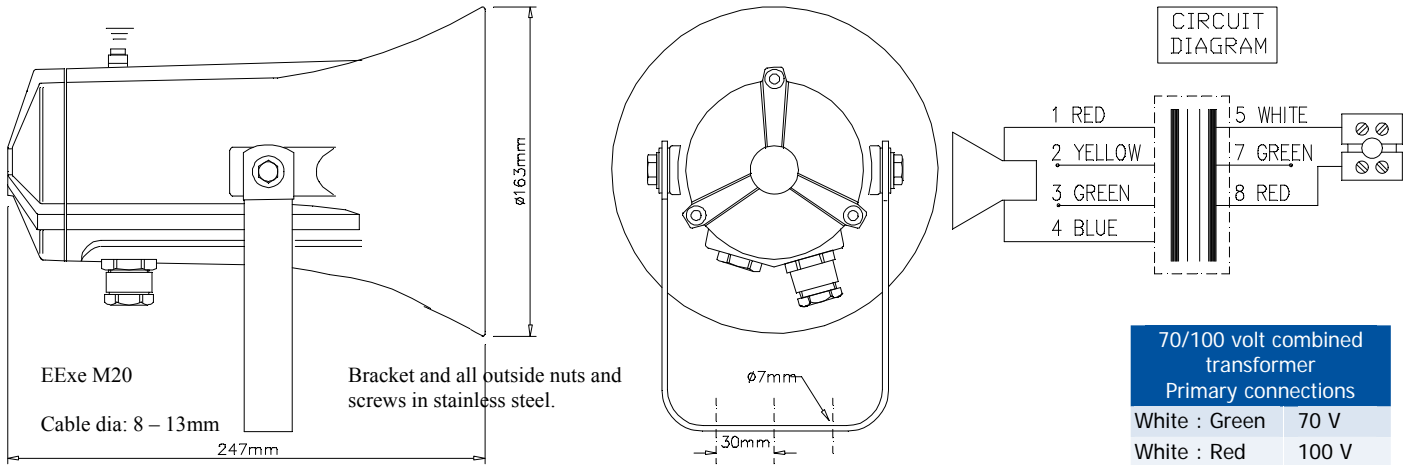

70/100 volt combined transformer Primary connections	
White : Green	70 V
White : Red	100 V
Secondary nominal tapings	
1 : 4	15,0 W
1 : 3	8,0 W
2 : 4	5,0W
1 : 2	4,5 W
3 : 4	2,5 W
2 : 3	1,0 W

Certified by / Certification code / Number: Nemko / II 3 G Ex nA II Gc / 10ATEX1056 - 50°C ≤ Ta +50°C

Sound pressure levels at 1W/1m Sine wave

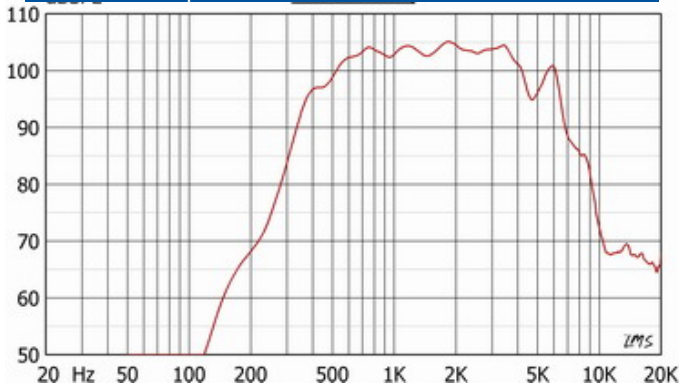

Specifications

Material / Color	Aluminum alloy / RAL 7035
Mounting	Bracket
Termination	e-chamber, screw terminals
Weight w/transformer	2,7 kg
IP-rating	67
Max. / min. amb. temp	50°C / -50°C
Rated / max. power	15 W / 15 W
SPL 1W/1m	107 dB
SPL rated power	118 dB
Effective freq. range	370 – 7000 Hz
Dispersion (-6dB) 1kHz / 4kHz	150° / 40°
Directivity factor, Q(2kHz)	
Options	Impedance, colors, labels

Installation, Operation and Maintenance Procedures

- Fasten the bracket to wall with 1-3 screws and ensure to use all washers in the same position that the loudspeaker is delivered with. (To isolate the main body from the bracket)
- To change the position of the loudspeaker, please adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Use only certified/specified cable glands and blanking plugs reflecting the same specifications as the rest of the loudspeaker with respect to IP rating and environmental temperature. (ATEX approved)
- WARNING:** Do not open the loudspeaker while energized.
- The aluminum surface of the loudspeaker should be regularly treated with paint at the same interval as with other similar outdoor equipment.
- If the loudspeaker is to be earthed, this must be done correctly to avoid galvanic corrosion.
- Fasten lid with a torque of 2 – 3 Nm to assure the IP rating.
- This loudspeaker is supplied with a 2 year warranty against defective materials and workmanship.

DNH reserves the right to alter specifications without notice

