



EUROSUL

Parachute Red Star Signal - Manual Manufacturer Code HGS40-30000

Importer:

EUROSUL supplier of Ships Ltda - Iapó Street, 180 - Alphaville Graciosa -
Pinhais - PR - CEP 83.327-075, Tel / Fax: 41 3668-1319 - CRL@eurosul.com

Manufacturer:

NINGBO ZHENHUA GLOBAL IMPORT AND EXPORT CO - LTD
983, FUMING Road, Jiangdong, Ningbo, Zhejiang - CHINA

Application:


A day or night long-range distress signal. 12 may be carried on ships bridge and there is a requirement for 4 in ships lifeboats and liferafts.

Description:

Parachute consists a cylindrical plastic tube with bottom in the end. The action system have a drive spring, firing, fuze, safety pin and clip, internally is made of metallic aluminum body containing mixed pyrotechnics pressed, the engine with propellant and nozzle. This is used in emergency situations day and nighttime danger of Long distances, where the squib after reaching 300mt ejects a signal bright stuck with parachute.

Operation:

1. Hold signal firmly and unscrew the red cap. Do not point at people or property.
2. Hold rocket vertically above head pointing away from body.
3. Ensure hands remain clear of top.
4. To fire - pull drawing ring and hold with two hands during the launching

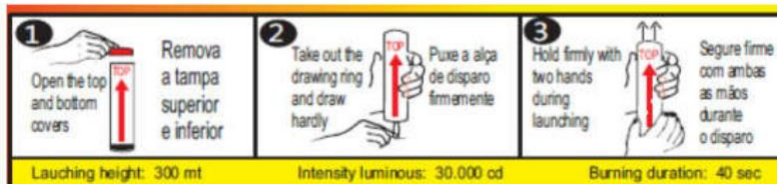

Technical specifications:

As approved SOLAS
Length: 267 mm
Diameter: 48 mm

Range (vertical): 300 m
Luminous Intensity: 30,000 candelas
Weight: 366 g Burning Time: At least 40 Seconds